

Bit Socket
for Oil Drain Plug, VW-Audi



KL-0288-30



0288-30e150508.docx

KLANN-Spezial-Werkzeugbau-GmbH

Breslauer Strasse 41
78166 Donaueschingen

Postfach 1329
78154 Donaueschingen - GERMANY

Tel.: +49 (0) 771 / 8 32 23-0
Fax: +49 (0) 771 / 8 32 23-90

E-Mail: info@klann-online.de
Internet: www.klann-online.de



KLANN UK

KLANN Tools Ltd.
Marton Street
BD23 1TF
Skipton, North Yorkshire
UNITED KINGDOM

Tel.: +44 (0) 1756-706700
Fax: +44 (0) 1756-798083

Email: sales@klanntools.co.uk
Internet: www.klanntools.co.uk

KLANN France

GEDORE-KLANN FRANCE SARL
Parc d'activités des Béthunes
10, avenue du fief bat. 12
BP 79144 - Saint-Ouen-L'Aumône
95074 CERGY PONTOISE CEDEX
FRANCE

Tél: +33 (0) 1.34.40.16.60
Fax: +33 (0) 1.34.40.16.61

E-mail: info-klann@gedore.fr
Internet: www.klann.fr

KL-0288-30

VW-Audi



Size (waf)
10 mm

KL-0288-30 - Bit Socket for Oil Drain Plug, VW-Audi

Suitable for the VW-Audi 1.2, 1.4, 1.8 and 2.0 TFSi, as well as for the 1.6 and 2.0 TDI engines equipped with a plastic oil drain plug (M14x1.5x22 mm) with special profile.

Engines installed, for example, in Audi A1, A3, A4, A5, Q5 and VW Golf VII etc.


Field of Application

Designed for the professional loosening/tightening of plastic oil drain plugs with special profile as found on oil sumps made of plastic. Necessary, for example, when changing the oil etc.


Scope of Delivery

Part No.	Description	Qty
KL-0288-30	Bit Socket for Oil Drain Plug, VW-Audi	1

Example of Use:

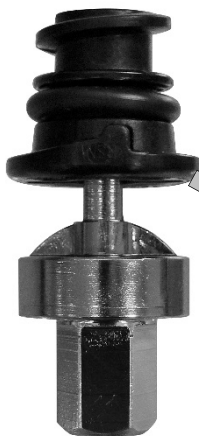

Plastic oil drain plug
with special profile



Technical Data

Size (drive): 10 mm (waf)

Overall length: 35 mm

⚠ Warnings and Notes

- DO NOT operate the tool by means of an impact wrench.
- Before putting the tool into operation, visually check to ensure that it is not damaged.
- Always refer to the vehicle manufacturer's data and instructions as only these apply to all work that is carried out on the vehicle.